



SCHULTHESS PROLINE D200

DIMENSIONS:

Height: 1350mm
Width: 790mm
Depth: 900mm

CAPACITY:

11kg

SUITABLE FOR:

- COMMERCIAL LAUNDRIES
- SCHOOLS & EDUCATION
- HOTELS & HOSPITALITY
- HOUSING ASSOCIATIONS
- HEALTHCARE
- LAUNDRETTES
- VETS & EQUINE

FEATURES:

- ▶ Precise residual moisture measurement
- ▶ Fast drying times
- ▶ Low energy consumption
- ▶ High efficiency through axial-radial air flow
- ▶ Convenient loading/unloading through large door
- ▶ Optimised waste heat recovery
- ▶ Robust construction for high durability
- ▶ Quietness < 60 db(A)

- ▶ Intuitive touch operation with 4.3" colour display
- ▶ Expert control
- ▶ 24 languages
- ▶ Time preset
- ▶ Crease protection
- ▶ Reversing drum
- ▶ Stainless steel drum
- ▶ Maintenance-free direct drive
- ▶ Fluff filter drawer

OPTIONS:


- ▶ Expert+ control
- ▶ Integrated prepaid card system
- ▶ Potential-free contact for external ventilation control
- ▶ Central fresh air intake 200 mm
- ▶ Central fresh air intake 160 mm
- ▶ Air vent 16
- ▶ Door hinge on the left ex works; changeover is possible on site
- ▶ Fluff filter drawer, lockable
- ▶ Machine plinth 270 mm

ONECARE[∞] This machine is eligible for our all inclusive service solution, One Care.

**service
Master** 

This machine is compatible with our smart laundry solution, serviceMaster

SCHULTHESS PROLINE DRYERS	D200	D325
Product number	4253	4255
Properties		
Load (1:18)	11kg	11kg
Load (1:20)	8kg	10kg
Drum capacity	200l	325l
Drum diameter	728 mm	728mm
Drum depth	480 mm	780 mm
Diameter of filling aperture	580 mm	580 mm
Evaporation rate	0,17l/min	0,25l/min
Drying rate	20kg/h	32kg/h
Energy consumption kWh / kWh/kg	6,25/0,57	10,0/0,56
Programmes		
Programme duration :	32 minutes	34 minutes
Ventilation installation		
Extraction rate (max.) m3/h	480	840
Air outlet Ø mm	200	200
Cable resistance on site max. Pa	200	200
Electrical connection		
Supply voltage (V)	400 3N~	400 3N~
Connected load	15 kW	21,2 kW
Heat output	14,4 kW	20,6 kW
Performance drive	0.6 kW	0,6 kW
Fuse protection	25 AT	32 AT
Safety and maintenance		
Complies with Swiss safety regulations	Yes	Yes
Complies with the European Machinery Directive	2006 / 42 / EC	2006 / 42 / EC

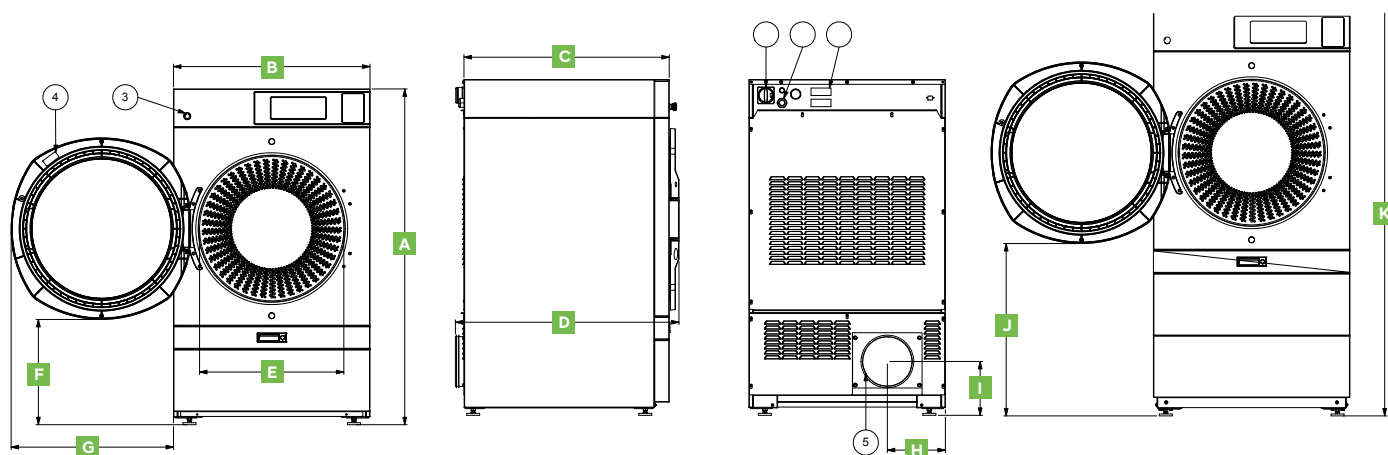

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
D200	1350	790	825	900	580	425	655	235	220	695	1620	196
D325	1350	790	1125	1200	580	425	655	235	220	695	1620	233